

## P R O D U C T D E S C R I P T I O N

# SPECIFICATION

People	4 persons
Frame	Spruce
Shape	Rectangle
Room	2
Sauna area	3.50m <sup>2</sup>
Total height	2656mm
Exterior Cladding	21mm
Interior Cladding	15mm
Wall thickness	169mm
Insulation	100mm
External dimension	2190x3265mm
Outside door size	800x2050mm
Inside door size	800x2000mm
Metal frame (can be operated with forklift)	2110x3185mm



# BASIC

### Materials

- Wall Alder STP 15x90mm AB
- Bench Alder 28x90mm
- Floor Alder rest on waterproof plywood

### Cilindro PPlus PP90

### Safety railing for Cilindro Plus

### XAFIR CS110 control unit for Cilindro Plus

### Accessories

- A-500-B Sauna bucket
- Thermo-/hygrometer wooden
- Wooden hourglass wooden

### Lighting

- Spotlight in vestibule
- Outdoor light
- 2 LED strip light (under upper bench and backrest) without dimmer


### Glass door with lock- opaque 8mm tempered glass

### Terrace wood plastic composite 1 side and one wooden grille





# KUUT Electric SAUNA L B A S I C

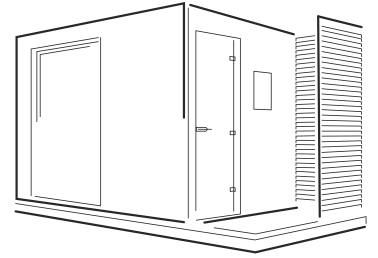

## DELIVERY

Size of pallets (LxWxH)	2200x3270mm H=2500mm
Weight	1200kg

Sauna 2,19x3,185m is delivered to the customer **assembled**.

## FLOOR STRUCTURE

- Floor finish 21mm
- Plywood 20mm
- Metal frame with insulation 100x150x6

## WALL STRUCTURE

- Wall finish 15mm
- Air gap 18mm and aluminum paper
- Wood construction 45x95mm with insulation 100mm
- Air gap 20mm
- Finishing wood 21x195mm

## CEILING STRUCTURE

- Ceiling finish 15mm sauna paneling
- Air gap 18mm and aluminum paper
- Wood construction 95x45mm with insulation 100mm
- Air gap 22mm
- OSB 19mm
- PVC roof cover

## HEATER

Harvia  
Cilindro Plus PP90  
Ø310x1020m



## SAFETY

Safety railing  
for the Cilindro Plus sauna heater  
HP33 Ø520mm



## CONTROL UNIT FOR CILINDRO PLUS HEATER

Harvia XAFIR CS110  
30x147x50mm



## ACCESSORIES

A-500-B  
Sauna bucket



## ACCESSORIES

Sentiotec thermometer  
and hygrometer  
A-210-THW




## ACCESSORIES

Sentiotec Wooden hourglass  
552-EP






# KUUT Electric SAUNA L B A S I C

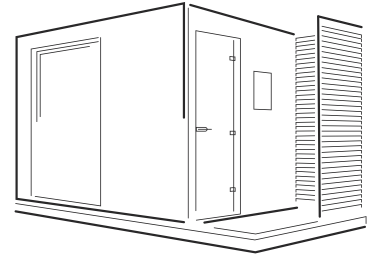

## LIGHTING

Spotlight LED GTV, 3W, 4000K, ORIS lamp  
LD-ORW03W-NB-E  
Ø90mmx12mm (25mm)



## OUTDOOR LIGHTING

ELED-631, 6W, LED, IP54  
105x120x160mm



## LIGHTING

LED strip light  
24V, 5W/m, 3000K



## ELECTRICITY

Power plug 16A IP44



## DOOR

2x Glass door  
2000x800mm  
2050x800mm

